


DZ35 - 110V

一般型(S)
Standard type

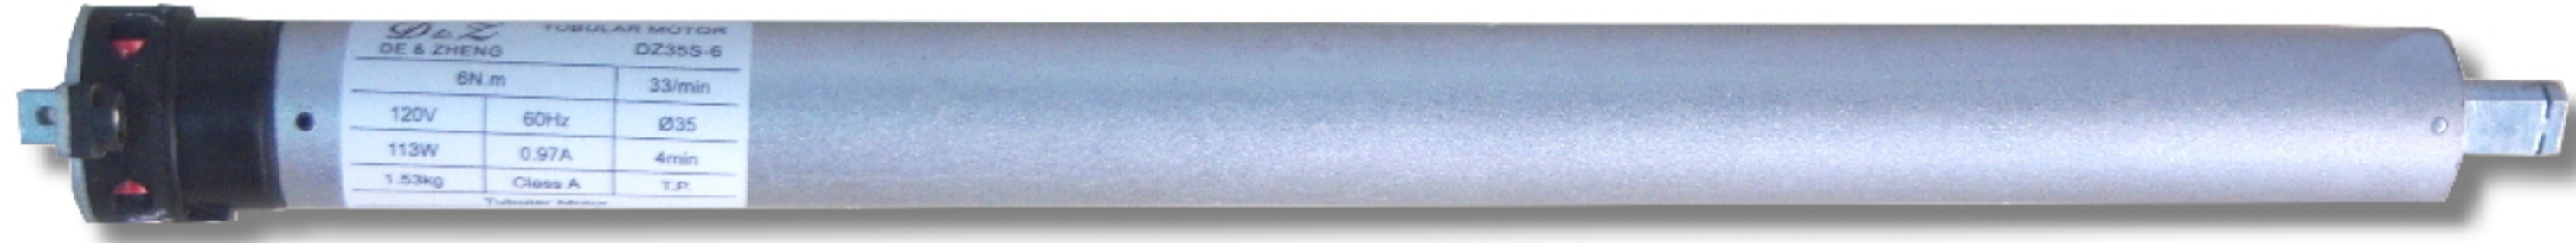

	Rated Torque (N.m)	Rated Speed (rpm)	Tube Diameter (mm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power Input (W)	Rated Current (A)	Running Time (min)	Degree of Protection (IP)	Max Number of Turns (turn)
DZ303	3	33	35	120	60	113	0.97	4	IP44	41
DZ306	6	33	35	120	60	113	0.97	4	IP44	41

DZ45 - 110V

一般型(S)
Standard type



手搖型(M)
Manual type



	Rated Torque (N.m)	Rated Speed (rpm)	Tube Diameter (mm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power Input (W)	Rated Current (A)	Running Time (min)	Degree of Protection (IP)	Max Number of Turns (turn)
DZ410	10	32	45	120	60	240	2.42	4	IP44	45
DZ420	20	32	45	120	60	235	2.20	4	IP44	45
DZ430	30	13	45	120	60	240	2.42	4	IP44	23
DZ440	40	13	45	120	60	205	1.92	4	IP44	23
DZ450	50	13	45	120	60	235	2.20	4	IP44	23

DZ60 - 110V

一般型(S)
Standard type



手搖型(M)
Manual type



	Rated Torque (N.m)	Rated Speed (rpm)	Tube Diameter (mm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power Input (W)	Rated Current (A)	Running Time (min)	Degree of Protection (IP)	Max Number of Turns (turn)
DZ660	60	11	60	120	60	278	2.41	4	IP44	22
DZ680	80	11	60	120	60	340	2.94	4	IP44	22
DZ6100	100	11	60	120	60	340	2.94	4	IP44	22