

## DZ35 - 220V

一般型(S)  
Standard type




	Rated Torque (N.m)	Rated Speed (rpm)	Tube Diameter (mm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power Input (W)	Rated Current (A)	Running Time (min)	Degree of Protection (IP)	Max Number of Turns (turn)
DZ303	3	28	35	230	50	125	0.52	4	IP44	41
DZ306	6	28	35	230	50	160	0.66	4	IP44	41

## DZ45 - 220V

一般型(S)  
Standard type

手搖型(M)  
Manual type

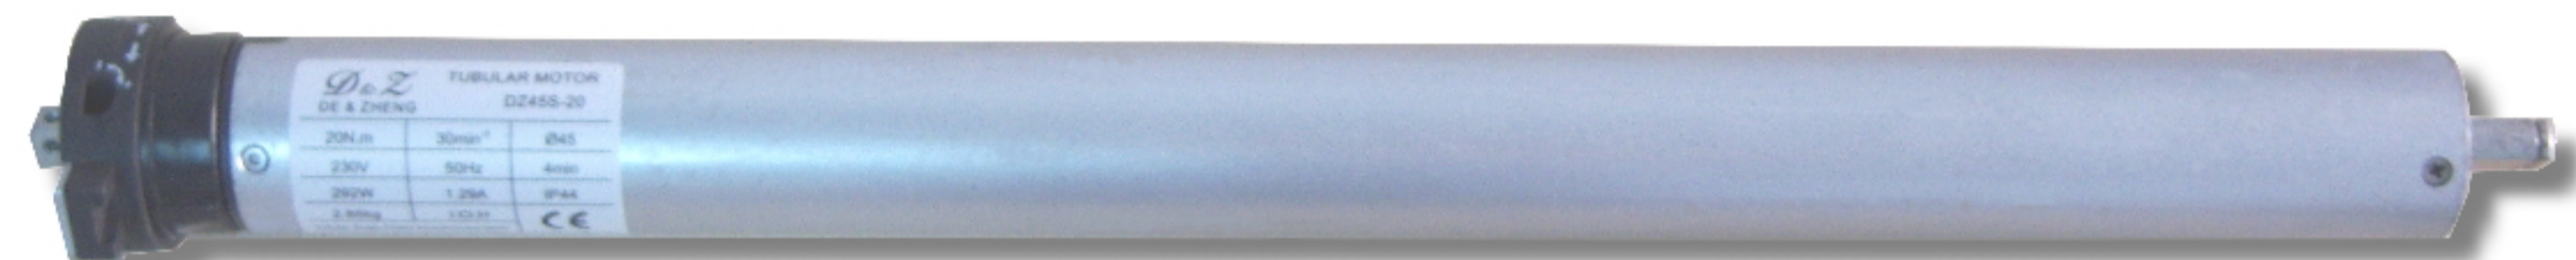

	Rated Torque (N.m)	Rated Speed (rpm)	Tube Diameter (mm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power Input (W)	Rated Current (A)	Running Time (min)	Degree of Protection (IP)	Max Number of Turns (turn)
DZ410	10	30	45	230	50	205	0.92	4	IP44	45
DZ420	20	30	45	230	50	292	1.29	4	IP44	45
DZ430	30	12	45	230	50	230	1.10	4	IP44	23
DZ440	40	12	45	230	50	292	1.29	4	IP44	23
DZ450	50	12	45	230	50	308	1.41	4	IP44	23

## DZ60 - 220V

一般型(S)  
Standard type

手搖型(M)  
Manual type



	Rated Torque (N.m)	Rated Speed (rpm)	Tube Diameter (mm)	Rated Voltage (V)	Rated Frequency (Hz)	Rated Power Input (W)	Rated Current (A)	Running Time (min)	Degree of Protection (IP)	Max Number of Turns (turn)
DZ660	60	12	60	230	50	370	1.60	4	IP44	22
DZ680	80	12	60	230	50	430	2.00	4	IP44	22
DZ6100	100	12	60	230	50	491	2.32	4	IP44	22